

Technical specification sheet


PCU30CL | Cutter

Specifications	
article number	159.000.177
model	PCU30CL
short description	Cutter
max. working pressure	psi 10443
battery included	no
max. cutting opening	in 6.7
theoretical cutting force	lbf 123420
protection rate	IP57
sound emission @ 1m/3.25ft	dB(A) 78
sound emission @ 4m/13ft	dB(A) 69
hydraulic oil type	ISO-L HV VG 36
NCT	True
cutter jaw	inclined
weight, ready for use	lb 33.7
temperature range	°F -4 + 131
weight excl. battery	lb 30.4
dimensions (AxBxC)	in 31.9 x 10.6 x 11.3
EN 13204 compliant	yes
EN 13204 classification	BC150-F-15.3
EN 13204, cutting capacity	1H 2G 3G 4F 5G
NFPA 1936, cutting capacity	A6 B5 C6 D6 E6 F2

Safety factors / tests	
hydraulic safety factor	2:1
endurance test tool	1000 cycles of biting in material that cannot be cut
endurance test dead man's handle	6000 cycles

Required articles	
Battery PBPA287	151.000.583
Battery Charger PBCH2 (AC-US)	151.000.742
Battery Charger PBCH3 (DC)	151.000.632

Accessories	
Tool Diagnostic Cord PTDC1	151.000.508
Battery Diagnostic Tool PBDT1	151.000.509
Mains Power Connector PMC2 (US)	151.000.743

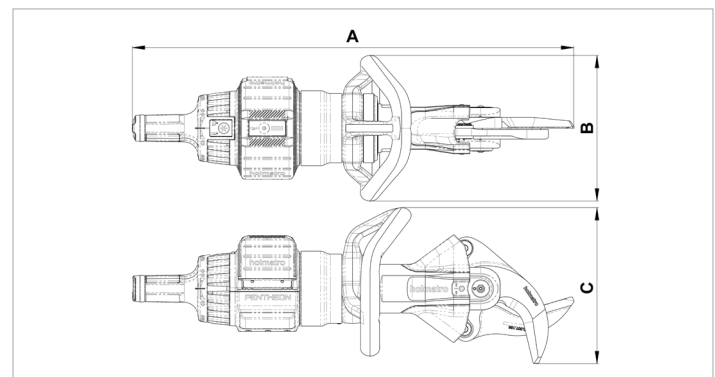

holmatro.com

© Holmatro 2021-05-21

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.